



VGOD TRICKTANK COILS

USER MANUAL

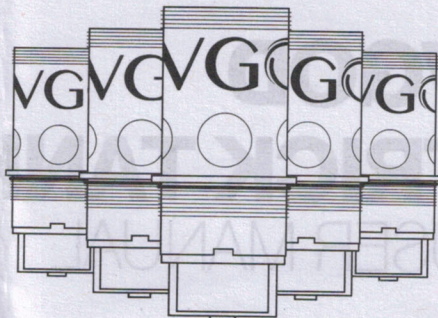

Coil Replacement Instructions

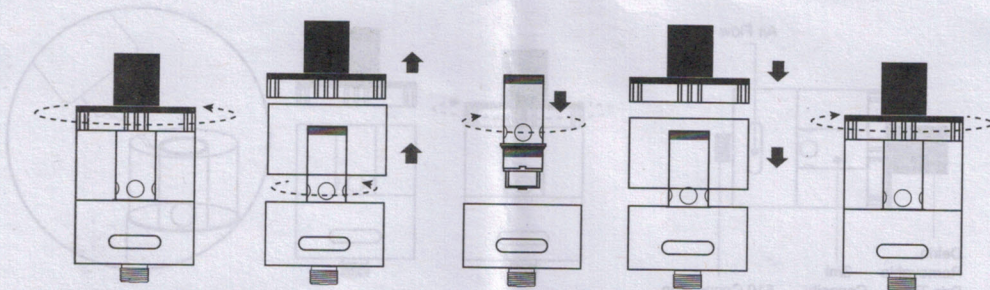

EN Welcome to the VGOD family and thank you for purchasing our products. Please keep in mind that you must be at least 18 years or older to use this product.


Coil Replacement

To replace the coil, remove the tank from the battery and make sure the device is cool. Hold the tank and unscrew the top of the tank. You will have to remove the pyrex glass when replacing the coil, make sure to use a cloth or napkin to wiggle the pyrex glass out of place instead of doing it directly with your hands. Then unscrew and remove the used coil and replace it with another. If the coil is not working, unscrew and re-screw the coil in tighter. It is highly recommended to prime the coil with e-liquid by inhaling from the tank without activating the battery. Then let the tank sit upright for at least 3-5 minutes before use.


Caution

- Store in a location that is not near water or in a moist environment, do not leave in your vehicle as this may cause leakage.
- To avoid overheating and damage to the coil, it is recommended not to exceed 5 seconds per inhalation. It is highly recommended to rest the device between each inhalation.
- Keep the device and its components out of reach from children and pets.
- The product should be used as instructed. VGOD will not be responsible for any damage caused to the product due to carelessness or improper use.
- For the best results and safe operation, use VGOD replacement coils only.


VGOD TRICK TANK USER MANUAL

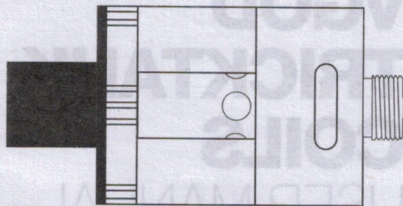

A. Tank

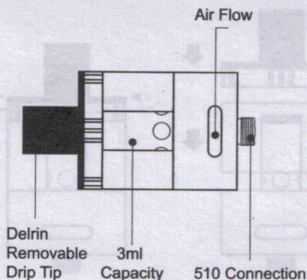

B. Liquid Filling Steps

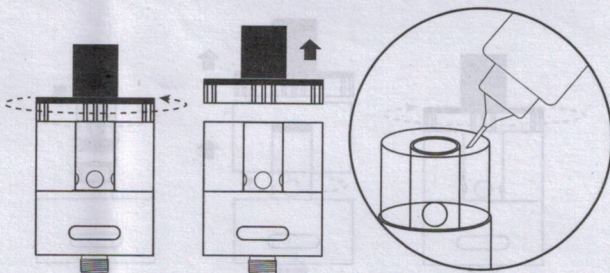

EN Welcome to the VGOD family and thank you for purchasing our products. Please keep in mind that you must be at least 18 years or older to use this product.

Note: When using the top fill feature make sure the tank is drained of liquid. If there is liquid remaining in the tank, cover the air holes with your fingers while filling in liquid from the top of the tank. Screw the top into the tank while holding the air holes and turn the tank upside down to equalize the pressure.

E-Liquid Filling Steps

To refill the tank first detach it from the battery. Then hold it straight and unscrew the top hardware of the tank. Fill on to the side of the tank, do not insert liquid into the coil chimney. Then screw the top back onto the tank. It is highly recommended to prime the coil with e-liquid by inhaling from the tank without activating the battery. Then let the tank sit upright for at least 3-5 minutes before use.

Caution

- When using low resistant coils/tanks, please make sure the battery is compatible with sub ohm tanks.
- To avoid leakage, always place the tank in an upright position especially when placing it in a pocket or bag and do not leave in your vehicle.
- If the e-liquid gets trapped in the airflow holes, you may hear a bubbling sound as you vape. Simply take a cloth and wrap it around the bottom of the tank where the airflow holes are located, and blow hard into the mouthpiece several times. This should push the e-liquid out through the air holes and onto the cloth.
- To avoid overheating and damage to the tank, it is recommended not to exceed 5 seconds per inhalation and to rest the device between each inhalation.
- Do not use the tank without e-liquid as this will cause permanent damage to the wick and the coil.
- For best results, ensure the e-liquid is refilled when it falls below the wick level of the coil. If you experience a burning taste or burning throat sensation, make sure you have enough e-liquid in the tank. If the burning sensation continues, immediately replace the coil with a new replaceable coil.